


Axessline outlet

935-R2DU




- 1** CUTOUT
Make the necessary cutout in desk top or partition wall: 217 x 63 mm. Note that additional customized cut-out might be needed for cables.

- 2** ADJUST (OPTIONAL)
Consider adjusting the side brackets to obtain best results. Four different positions can be achieved by unscrewing and re-mounting side brackets. Two of which are illustrated.

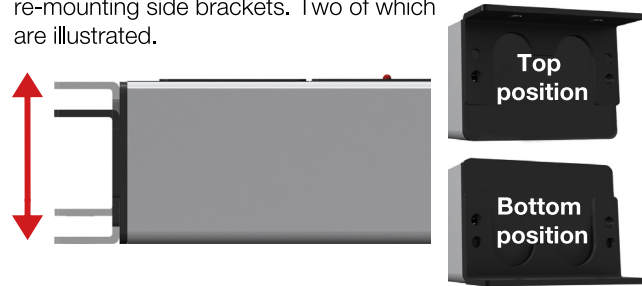


- 4** CONNECT
Connect cables to corresponding external components.

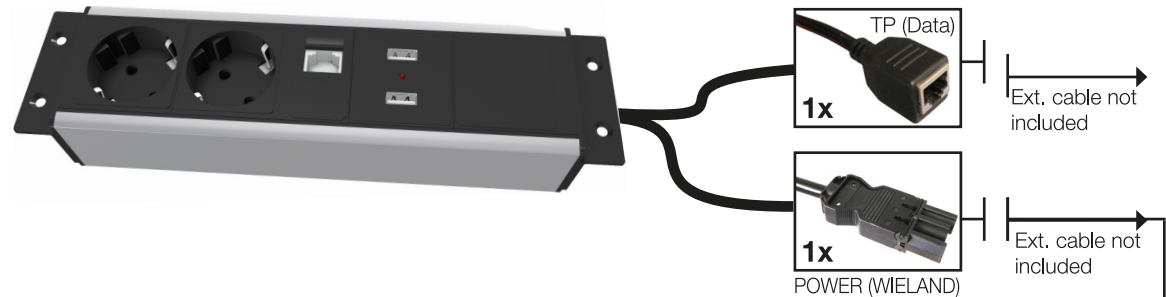

- 3a** MOUNTING (ALTERNATIVE 1)
Mount to wall using 4 screws (not included).
By flipping side brackets upside-down, they can remain hidden behind the screen (see step **2**).



- 3b** MOUNTING (ALTERNATIVE 2)
Mount to wall using 4 screws (not included).
By flipping side brackets upside-down, they can remain hidden beneath the table (see step **2**).

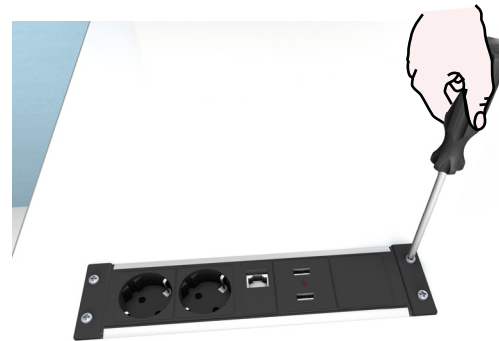

- Accessories:
Wieland ↔ Schuko
2.0 m **935-BA20**
3.0 m **935-BA30**
5.0 m **935-BA50**

WIELAND GST18I3S Female type
Part no 92.931.3053.1
VDE Approval no. 40018414
Cable cord specification
H05VV-F according to EN 50525-2-11
minimum 3 x 1.5 mm